


Ravenna 17 Door Only

Table of Contents


Table of Contents	2
Included Parts	3
Tools Required	4
Aluminium Profile assembly	5
Glass side panel assembly	8
Glass door panel assembly	10
Apply silicone sealant	12

Included Parts

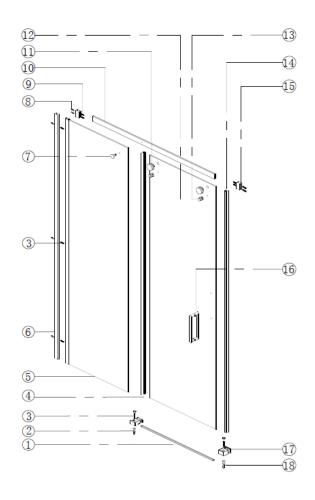

Ref	Description	Illustrations	Qty	Ref	Description	Illustration	Qty
1	Bottom Door Seal		1	10	Supporting Bar		1
2	Glass Fixing Piece		(R/L) 1	11)	Door Rollers		2
3	ST4*40		2	12	Glass Door		1
4	Door Seal		1	13	Supporting Bar Stabilisers	M	2
(5)	Glass Side Panel		1	14)	Door Seal		1
6	Aluminium Profile		1	15)	Supporting Bar Bracket		2
7	Supporting Bar Fixing Pieces	0	1	16	Handle		1
8	Wall Plugs		2	17)	Glass Fixing Piece		(R/L) 1
9	ST5*40	3	12	18)	Wall Plugs		2

Tools Required

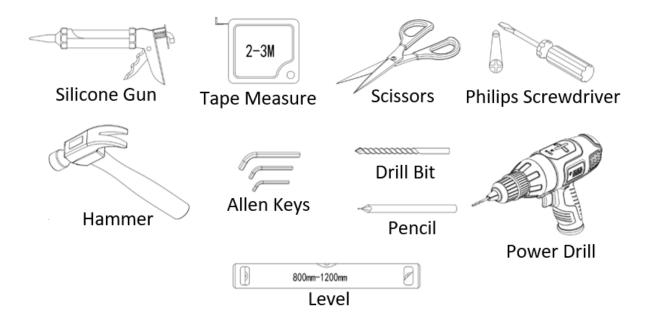

Two people required. We recommend that a technically competent installer should undertake this installation.

Be sure you have all included parts and tools required before beginning installation and that you have plenty of space for assembly.

PRE-INSTALLATION AND TECHNICAL REQUIREMENTS


- All dimensions are shown in millimetres, except where otherwise indicated.
- Ensure that the enclosure set is fitted to a level floor and vertical wall surface.
- This instruction manual is applicable for both pre-tiled wall and plain walls.
- The wall fixings included with this product are suitable for solid walls only. Plasterboard or stud walls may require specialist fixings (not supplied).
- Due to the possibility of residual spray, the area around the outside of the shower tray should be tiled, or made otherwise water resistant.


IMPORTANT SAFETY NOTES

- Under no circumstances should you attempt to drill through the glass, damage or injury may occur
- Please handle all glass with care, avoiding knocks and shock loading to all sides and edges. Safety glass cannot be reworked.
- Care should be taken when drilling into walls to avoid hidden pipes or electrical cables.


Aluminium Profile assembly

1. Measure the distance from the wall to where your shower door will be fitted.

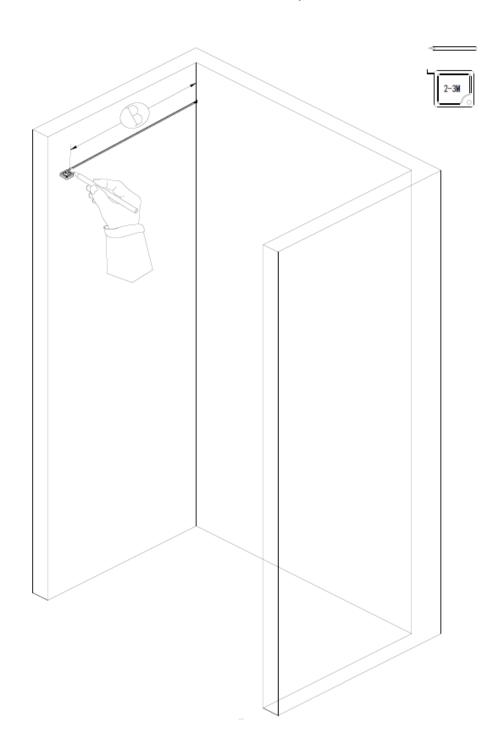

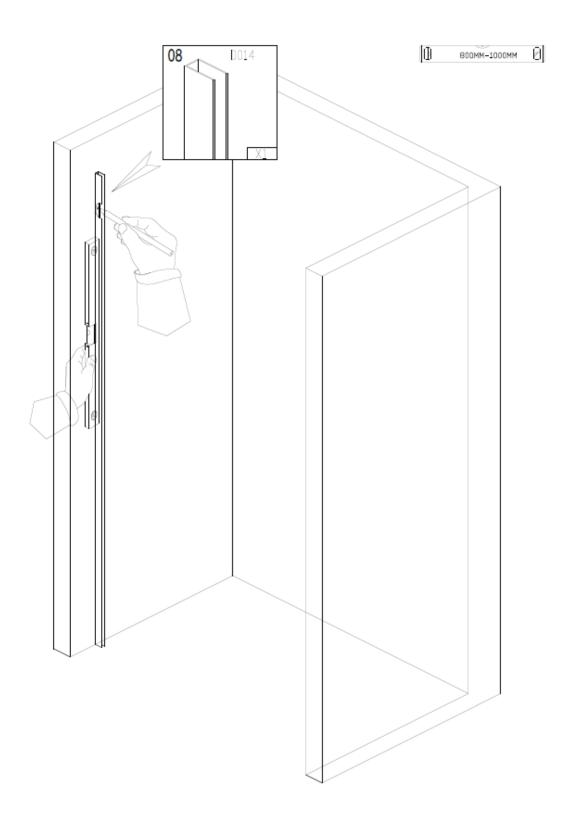


2. Place the aluminium profile against the wall, using a spirit level and a pencil to mark where holes will be drilled.

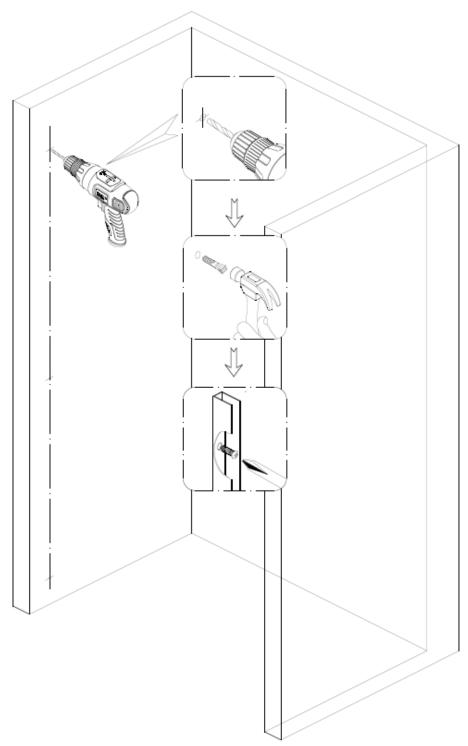


- 3. Drill the holes and insert wall plugs.
- 4. Screw the aluminium profile onto the wall.

Glass side panel assembly

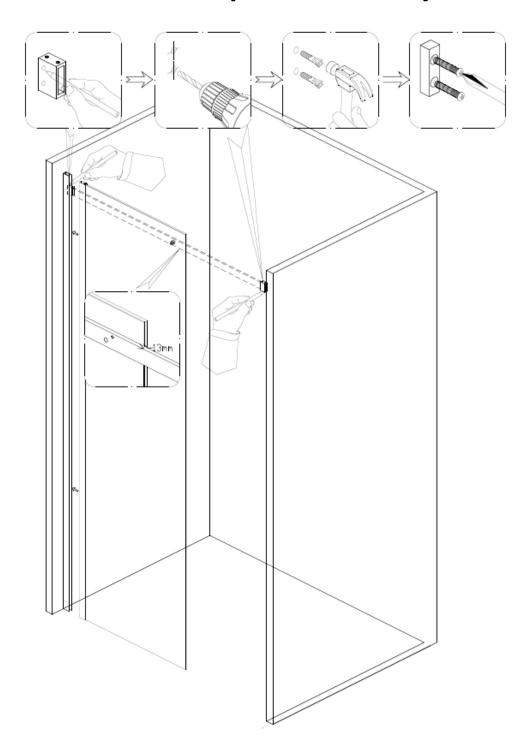


- 5. Place the supporting bar brackets in place on each wall, marking where holes will be drilled.
- 6. Drill holes and insert wall plugs.
- 7. Screw the brackets to the walls.
- 8. Carefully lift the glass side panel into place

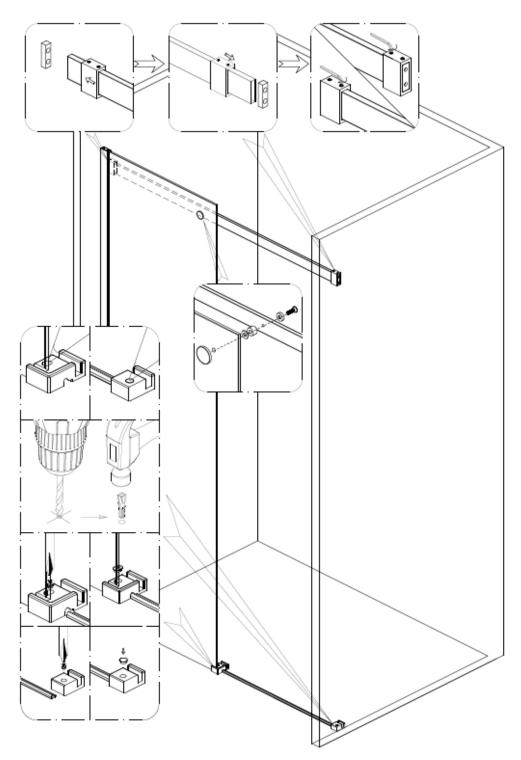


- 9. Attach the supporting bar to its brackets and the glass side panel.
- 10. Slide the glass fixing pieces into place, marking where holes will be drilled.
- 11. Drill holes, insert plugs and screw them into place.

Glass door panel assembly

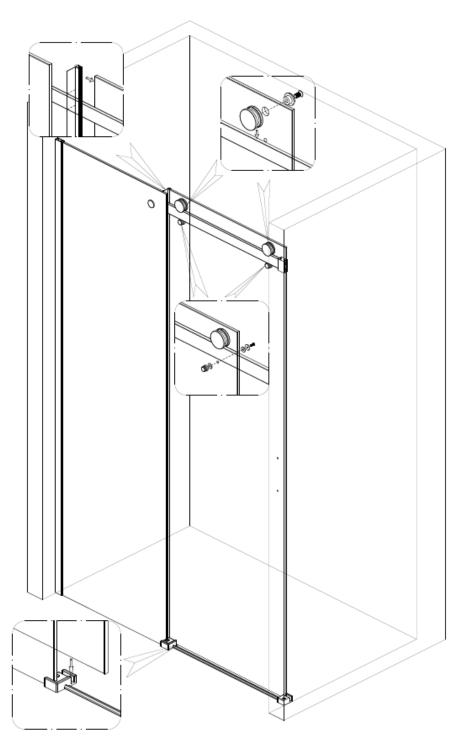

- 12. Attach left seal to the glass door.
- 13. Attach rollers to the glass door.
- 14. Carefully lift the glass door into place.

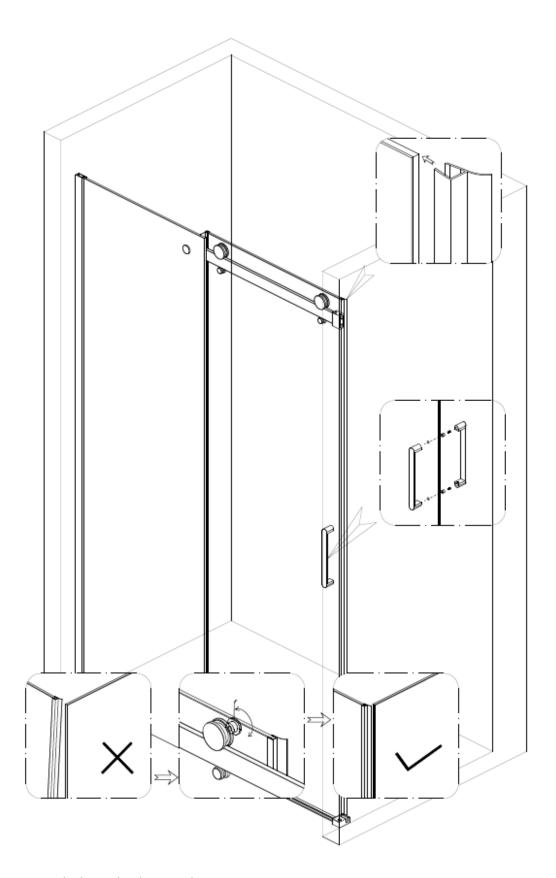

- 15. Attach the right door seal.
- 16. Attach the handle to the glass door.
- 17. Tighten the rollers if necessary.

Apply silicone sealant

- 18. Insert caps onto the rollers.
- 19. Silicone and allow to dry for 24 hours.

